



9-1-05 *Ltr*

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
31.08.2005 Bulletin 2005/35

(51) Int Cl.7: **B27L 11/00**, B27L 11/02

(21) Application number: 05002443.9

(22) Date of filing: 04.02.2005

(84) Designated Contracting States:
 AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR
 Designated Extension States:
 AL BA HR LV MK YU

(72) Inventor: **Stager, Bradley R.**
Beaverton Oregon 97008 (US)

(74) Representative: Hirsz, Christopher Stanislaw et al
HLBBshaw
Merlin House
Falconry Court
Baker's Lane
Epping
Essex CM16 5DQ (GB)

(30) Priority: 26.02.2004 US 789268


(71) Applicant: Key Knife, Inc.
Oregon 97062 (US)

(54) **Ring slicer with easily removable knife and knife assembly**

(57) A ring slicer with easily removable knife (36) and knife assembly (60). According to one aspect of the invention, a ring assembly comprises two end plates (18) for rotation about an axis of rotation. Each of the knife assemblies (60) comprises an elongate knife (36) having a cutting edge extending along an elongate axis,

a base (64), and a clamp (62) for clamping the knife to the base. The knife assemblies (60) are adapted for installation between the end plates (18) such that the shoulder portions (70a,72a) of at least two shoulder bolts (70,72) extend through one of the end plates (18a) into the base (64).

Fig. 14

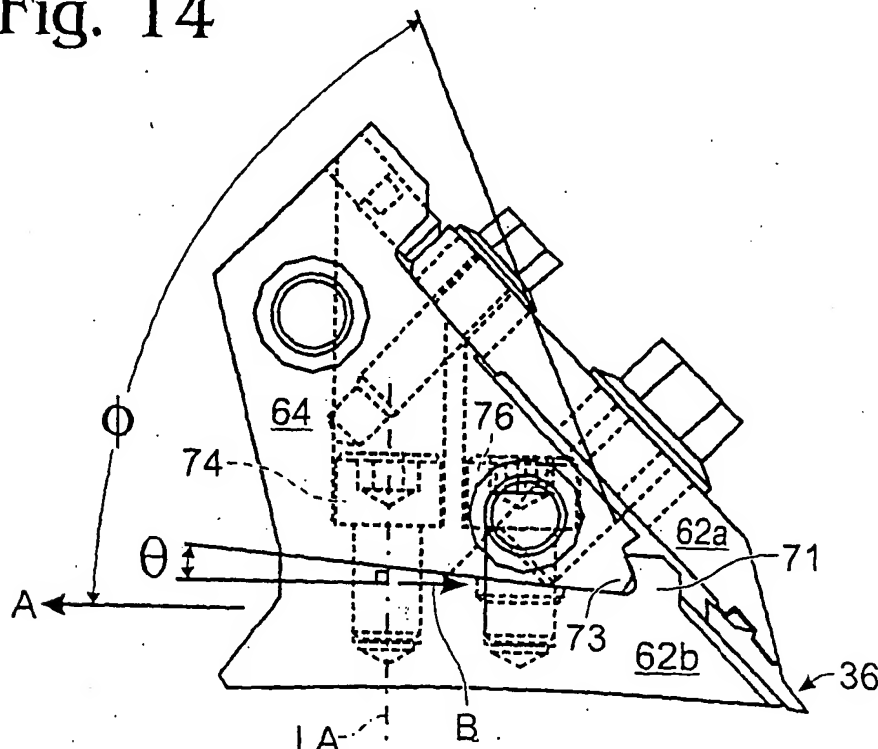

Description

Related Application

[0001] This is a continuation-in-part of U.S. No. 10/280,278.

Field of the Invention

[0002] The present invention relates to a ring slicer having an easily removable knife and knife assembly, particularly for use in slicing or flaking logs, refuse lumber, chips, or other articles of wood in a lumber mill.

Background of the Invention

[0003] Ring slicers, also termed ring flakers or stranders, are generally used in manufacturing facilities for manufacturing particle board, oriented strand board, and fiberboard such as MDF. They convert logs, refuse lumber, chips, or other articles of wood into flakes, wafers or strands for the manufactured board products. The ring slicer includes a cylindrical ring assembly for revolution about an axis of rotation. The ring assembly typically includes a large number of elongate knife assemblies, commonly 49 but which may be as many as 72. The knife assemblies support elongate knives having cutting edges extending parallel to the axis of rotation captured between annular end plates. The ring assembly rotates within a chamber into which pieces of wood to be cut or chipped are introduced.

[0004] The knives are subject to wear from the wood, and in addition rocks, metal objects and other hard foreign material carried by or with the wood also wear the knives, and may damage or break the knives as well as the knife assemblies. Accordingly, it is routinely required to remove the knives to repair or replace them, or to turn them to expose fresh cutting edges. Moreover, it is episodically required to remove and replace some or all of the knives, the knife assemblies, or both, as a result of "crashes" of the ring slicer apparatus. The machine downtime and the labor required to effect maintenance and repair are costly and desirably kept to a bare minimum.

[0005] As described in U.S. Patent No. 5,313,696, the knives may be mounted to a portable knife assembly that slides radially into slots in the end plates of the ring assembly. Once in place, bolts are inserted through holes in the end plates into threaded holes in the knife assembly to hold the knife assembly in place. In turn, the knife is similarly mounted to the knife assembly with bolts extending through holes in the knife into threaded holes in the knife assembly.

[0006] One problem with this approach is that the bolt holes require a tolerance that permits the knife or knife assemblies to move or creep within the ring assembly and thereby to become misaligned or to loosen as a result of the large cutting forces encountered during oper-

ation. Moreover, removing the knife from the ring slicer requires both removing the knife assembly from the ring assembly and removing the knife from the knife assembly.

[0007] To hold the knife assembly more securely to the ring assembly, the knife assembly may be provided with protruding keys that extend axially into corresponding keyholes in the end plates. The keys and keyholes can be provided with a minimal tolerance of fit that maintains the positional integrity of the knife assembly. However, a major disadvantage of this approach is that the knife assemblies may no longer be simply slid radially away from the ring assembly for maintenance or repair. Rather, the end plates must be axially spaced apart a sufficient amount to permit the projecting keys to clear the end plates, requiring that the entirety of at least one end plate be decoupled from all of the knife assemblies.

[0008] It is often necessary to remove a knife from the knife assembly under conditions where it is not otherwise necessary to remove the knife assembly from the ring assembly. U.S. Patent No. 5,937,923 addresses this problem by providing a clamp for the knife that is biased outwardly by springs disposed in spring holes in the knife assembly, for unclamping the knife without requiring removal of the clamping bolts.

[0009] A disadvantage of the mechanism is that it requires the clamp to move radially, and while a necessary indexing of the clamp is provided to seat the clamp into proper position when it is tightened, this is provided in the form of sliding surfaces that wear over time so that the position of the clamp and, therefore, the knife are permitted to wander. Another disadvantage of the mechanism is that it is difficult to remove cut wood fibers introduced into the spring holes when the clamp is loosened. It is yet another disadvantage of the mechanism that the spring forces produced by the multiple compression springs must be well matched to prevent binding of the clamp.

[0010] Accordingly, there is a need for a ring slicer having an easily removable knife and knife assembly that provides for positive maintenance of the position of the knife in the ring slicer as well as easy removal of the knife and knife assembly therefrom.

Summary of the Invention

[0011] The invention disclosed herein is a ring slicer having an easily removable knife and knife assembly. According to one aspect of the invention, there is an assembly for clamping a knife, the knife having two sides, the assembly comprising a base and a clamp for clamping the knife to the base. The clamp includes an upper clamping member for mounting to the base so that a portion of the upper clamping member is cantilevered from the base. The upper clamping member includes provision for at least one bolt extending through the portion into the base such that tightening the bolt elastically deflects the upper clamping member against one side of

the knife.

[0012] According to another aspect of the invention, there is an assembly for clamping a knife, comprising a base and a clamp. The clamp includes an upper clamping member for mounting to the base and a wearshoe for separately mounting to the base. The clamp is adapted for clamping the knife between the upper clamping member and the wearshoe. The wearshoe and the base include cooperatively interlocking portions adapted to resist relative motion between the wearshoe and the base in a first direction. Alternatively or in addition, the wearshoe and the base include cooperatively ramping portions adapted to resist relative motion between the wearshoe and the base in one direction.

[0013] According to yet another aspect of the invention, there is an apparatus for cutting an article of wood, comprising a ring assembly and a plurality of knife assemblies. The ring assembly comprises two end plates for rotation about an axis of rotation. Each of the knife assemblies comprises an elongate knife having a cutting edge extending along an elongate axis, a base, and a clamp for clamping the knife to the base. The knife assemblies are adapted for installation between the end plates such that the shoulder portions of at least two shoulder bolts extend through one of the end plates into the base. Preferably the knife has dual cutting edges.

Brief Description of the Drawings

[0014]

Figure 1 is a front, partially cut-away view of a prior art ring slicer.

Figure 2 is a plan, section view of the ring slicer of Figure 1, taken along a line 2-2 thereof.

Figure 3 is a partially cut-away, elevational view of a prior art knife assembly for the ring slicer of Figures 1 and 2.

Figure 4 is a pictorial view of a ring assembly according to the present invention.

Figure 5 is a pictorial view of a knife assembly according to the present invention.

Figure 6 is an end view of the knife assembly of Figure 5.

Figure 7 is the end view of Figure 6 showing selected phantom lines.

Figure 8A is a top pictorial view of a knife for use in the knife assembly of Figure 5.

Figure 8B is a bottom pictorial view of the knife of Figure 9A.

Figure 9 is a pictorial view of the knife assembly of Figure 5, showing partial removal of the knife therefrom.

Figure 10 is a pictorial view of the knife assembly of Figure 5, showing complete removal of the knife therefrom.

Figure 11 is a pictorial view of a portion of the ring assembly of Figure 4, showing removal of the knife

assembly therefrom.

Figure 12 is a side elevation of the knife assembly of Figure 5.

Figure 13 is a pictorial view of a portion of an alternative ring assembly according to the present invention.

Figure 14 is an end view of an alternative knife assembly according to the present invention.

Detailed Description of a Preferred Embodiment

[0015] Referring to Figures 1 and 2, a prior art ring slicer 12 is shown, such as disclosed in U.S. Patent No. 5,937,923. The ring slicer has a ring assembly 10 that is caused to rotate about an axis of rotation "L." The ring assembly 10 has a number of cutting knife assemblies 16 for cutting and chipping pieces of wood 9 that flow in the direction indicated as "F" in Figure 2) into the apparatus through an opening 11. The ring slicer also includes a "rotor" 14 that counter-rotates with respect to the ring assembly 10 about the axis "L," to sling the pieces of wood 9 against the knives of the ring assembly. A drive mechanism 13 includes respective motors (not shown) for driving the rotor through an arbor shaft 15 and for driving the ring assembly 10 through a coaxially disposed drive-shaft 16. The knife assemblies 16 are captured between two annular rings 18 (not shown in Figure 1).

[0016] The ring slicer 12 is particularly adapted to manufacture particle board; however, with suitable adaptation the ring slicer may be used to manufacture oriented strand board as well. While either of these are preferred contexts for the present invention, the principles of the invention may be applied to any cutting apparatus, particularly any cutting apparatus for processing articles of wood.

[0017] Turning to Figure 3, a prior art knife assembly 16 is shown, captured between the two annular rings 18 of the ring assembly shown in Figure 2. The knife assembly 16 has an elongate body 21 to which is directly bolted, by use of bolts 15a, an elongate knife 23 having a cutting edge 24. The body includes threaded holes at ends 26a, 26b thereof for bolting the body between the rings 18 by use of bolts 15b. The body also includes respective projecting keys 27 at the ends for extending into mating keyholes in the rings, the reversal of the keys and keyholes being functionally equivalent. While the bolts 15 hold the ring assembly together, the keys and keyholes are used to locate the knife assemblies with respect to the rings and thereby prevent creep of the knife assembly resulting in misalignment during use. A similar strategy could be used to key the knife 23 to the body 21.

[0018] To remove the knife 23 from the knife assembly 16 when it is installed between the rings 18 requires complete removal of all of the bolts 15a of the knife assembly. To remove the knife assembly 16 from the ring assembly 10 requires removing the bolts 15b, and mov-

ing the rings 18 axially far enough apart so that the projecting keys 27 clear the inside faces 29 of the rings 18 so that the knife assembly can be slid outwardly from the ring assembly. This latter step requires at least loosening and typically completely removing the bolts 15b for every knife assembly in the ring assembly. Where there are typically 49 or as many as 72 knife assemblies in the ring assembly, this is an objectionably laborious and time consuming process.

[0019] Turning to Figure 4, a ring assembly 30 according to the present invention is shown that substantially reduces the time and labor required to change either the knives of the knife assemblies, or the knife assemblies themselves.

[0020] The ring assembly 30 includes two end plates 32a, 32b which are preferably but not necessarily annular in shape. Captured between the two end plates 32 are a plurality of individual knife assemblies 34. There are typically 49 knife assemblies, but the number of knife assemblies may vary considerably. For example, ring slicers are available with as few as 32 knife assemblies and as many as 72 knife assemblies.

[0021] Figures 5 and 6 show a knife assembly 34 according to the present invention. The knife assembly includes a knife 36, a clamp 38 and a base 40. The clamp 38 includes an upper clamping member 38a and a wearshoe 38b that functions as a lower clamping member. Both the wearshoe and the upper clamping member are bolted to the base such as shown in Figure 7. A preferred knife 36 for use in the knife assembly 34 is also shown in Figures 8A and 8B.

[0022] The knife 36 is clamped to the base 40 by the clamp 38. Particularly, the knife is held between the upper clamping member 38a and the wearshoe 38b. The upper clamping member is bolted to the base 40 by use of a bolt 45a, and the wearshoe is bolted to the base by use of a bolt 45b (Figure 7). However, the knife is not yet held by the clamp 38 until a clamp bolt 45c is tightened.

[0023] Particularly, the base has a raised support portion 42 (Figure 6) on which one end of the upper clamping member 38a is supported. The upper clamping member is cantilevered out from this support and without any deflection is spaced apart from the wearshoe by a distance "d" that is greater than the thickness "t" of the knife. Tightening the clamp bolt 45c therefore deflects the cantilevered upper clamping member 38 elastically so as to bring it into contact with the knife, and further tightening of the clamp bolt tightens the clamp. Accordingly, loosening the clamp bolt 45c releases the clamping force on the knife and the upper clamping member relaxes its elastic deflection, freeing the knife for easy removal from the knife assembly 34. The cantilever arrangement of the upper clamping member provides the outstanding advantage, as compared to prior art spring-clamp mechanisms, of being unaffected by packing and manufacturing tolerance. This is because the cantilever can be deflected despite any cut wood fibers caught be-

tween the upper clamping member and the base, and because the entire upper clamping member functions as a single spring, the characteristics of which do not have to cooperate with those of any other springs.

[0024] Preferably, there is about a 0.004" to 0.008" clearance between the upper clamping member 38 and the knife when the clamp bolt 45c is fully loosened and, therefore, the upper clamping member 38 is in its relaxed, undeflected, state. Multiple instances of the clamp bolt 45c are preferably provided such as shown in Figure 5 to ensure that the required clamping force can be exerted and maintained.

[0025] The wearshoe 38b and the base 40 advantageously include cooperatively interlocking portions 41 and 43 respectively, that function to index, strengthen and secure the attachment of the wearshoe to the base. Particularly, the interlocking portions 41 and 43 prevent movement of the wearshoe with respect to the base in the direction indicated as "A," and thereby ensure that the distance "d" is and remains fixed.

[0026] Referring to Figures 9 and 10, the knife 36, once unclamped by loosening the clamp bolt(s) 45c, can be installed into or removed from the knife assembly 34 in the direction of the arrows. Turning back to Figure 4, these operations can be accomplished while the knife assembly is still in place in the ring assembly 30 simply by sliding the knife axially out of the ring assembly 34 through a corresponding slot 44 (see also Figure 11) in the end plates 32. It is an outstanding advantage of the ring assembly 30 that neither the clamp bolts nor the knife assembly needs to be removed in order to remove the knife.

[0027] Preferably, slots 44 corresponding to a particular knife assembly 34 are provided on both end plates 32a and 32b (Figure 11), so that the knife may be conveniently removed through one a slot in one of the end plates, e.g., 32a, by pushing another knife into place through the corresponding slot in the other end plate. For example, a knife 36 may be pushed into the knife assembly 34 while the knife assembly is installed in the ring assembly 10 of Figure 11 through slot 44b in the end plate 32b, which will act to push the knife already in the knife assembly 34 out the slot 44a of the end plate 32a.

[0028] Turning to another aspect of the invention, Figures 6, 9, 10 and 11 show dowel pins 48 extending from the base 40. Referring to Figure 12, the dowel pins 48 are slidably disposed in dowel holes 50 in the base and extend into or through dowel holes 51 in the end plates 32. Bolts 45d (see also Figure 7) extend through the end plates 32 into holes 53 (Figure 6) in the base to hold the ring assembly together. The dowel pins are tight-fitting in the respective dowel holes, but are preferably slidably movable therein by pressing or punching the pins with hand tools. The dowel holes extend deeply enough into the base that the dowel pins may be pressed or punched into the holes and wholly contained thereby, so that outer ends 49 of the dowel pins may be substantially flush

with or beneath an outer end surfaces 51 of the base. Accordingly, if the length of the dowel pins is " L_1 ," the depth of the dowel holes " L_2 ," is preferably at least as great as " L_1 ."

[0029] In the ring assembly 30, the dowel pins are ordinarily positioned to extend from the dowel holes, into or through the plates 32, to locate the base 40 to the plates 32. However, to remove the knife assembly 34 from the ring assembly, the dowel pins on at least one end of the knife assembly may be pressed or punched into the dowel holes so that the knife assembly is free to slide radially out of the ring assembly. It is an outstanding advantage of the ring assembly 30 that the knife assembly can be removed from the ring assembly simply by removing the bolts 45 d and pressing or punching the dowel pins on at least one end of the knife assembly into their respective dowel holes.

[0030] Figure 13 shows an alternative knife assembly 60 according to the present invention along with a portion of the ring assembly 10 to which it is to be attached. Like the knife assembly 10, the knife assembly 60 has a knife 36, a clamp 62 and a base 64. The knife 36 preferably includes dual cutting edges 36a and 36b (seen in end-view in Figure 13). The clamp 62 includes an upper clamping member 62a and a wearshoe 62b that functions as a lower clamping member. Both the wearshoe and the upper clamping member are bolted to the base as shown in Figure 14. The knife 36 is preferably the same as the knife described above in connection with the knife assembly 10, and the knife is preferably clamped to the base in the same manner.

[0031] The wearshoe 62b and the base 64 advantageously include cooperatively interlocking portions 71 and 73 respectively, that function to index, strengthen and secure the attachment of the wearshoe to the base. Particularly, the interlocking portions 71 and 73 prevent movement of the wearshoe with respect to the base in the direction indicated as "A." The cooperatively interlocking portions are preferably angled at an angle Θ of about 45 - 60 degrees defined as shown.

[0032] In addition, the wearshoe and base include cooperatively ramping portions 75 and 77 respectively, that function to further prevent movement of the wearshoe relative to the base. Particularly, the ramping portions are oriented at an angle θ defined relative to the longitudinal axes "LA" of bolts 74 and 76 that secure the wearshoe to the base; particularly with respect to the perpendicular to these axes which in the embodiment shown is parallel to the direction "A." The angle θ is positive (defined as shown) and shallow, preferably about 5 degrees. In response to the force exerted by the bolts, the positively angled ramping portions tend to prevent movement of the wearshoe with respect to the base in the direction perpendicular to the axes "LA", which is indicated as "B."

[0033] Turning back to Figure 13, an alternative means for attaching a knife assembly to the ring assembly 10 is shown. The ring assembly has two annular

rings 18a and 18b (not shown). One end of the base 64 has at least two holes 66a and 68a, and the associated ring 18a has a corresponding set of holes 66b and 68b, for receiving a corresponding set of at least two shoulder bolts 70 and 72 that extend through the ring 18a. Preferably, corresponding sets of holes and shoulder bolts are provided at the other end of the knife assembly that is not shown.

[0034] The holes 66 and 68 provide a close tolerance clearance fit, e.g., 0.002", to shoulder portions 70a and 72a of the shoulder bolts, for aligning the knife assembly to the ring assembly. The holes 66 and 68 terminate in threaded portions (not shown) that receive the corresponding threaded portions 70b and 72b of the shoulder bolts, for bolting the knife assembly to the ring assembly. Head portions 70c and 72c of the shoulder bolts are preferably received by and seat in counterbored holes 80 in the ring 18a, though this not essential.

[0035] Each shoulder bolt provides the advantage of both aligning and attaching the knife assembly to the ring assembly. The two (or more) shoulder bolts together provide a greater degree of alignment and strength with less installation effort than prior art attaching means comprising separate alignment pins and bolts. While the shoulder bolts are shown for use with the knife assembly 60, they may be used in place of the dowel pins of the knife assembly 10 as well, and may be used to equal advantage in other alternative knife assemblies.

[0036] It is to be recognized that, while a particular ring slicer having an easily removable knife and knife assembly has been shown and described as preferred, other configurations and methods could be utilized, in addition to those already mentioned, without departing from the principles of the invention.

[0037] The terms and expressions which have been employed in the foregoing specification are used therein as terms of description and not of limitation, and there is no intention in the use of such terms and expressions to exclude equivalents of the features shown and described or portions thereof, it being recognized that the scope of the invention is defined and limited only by the claims which follow.

Claims

1. An assembly for clamping a knife, the knife having two sides, the assembly comprising:

a base; and

a clamp for clamping the knife to said base, said clamp including an upper clamping member for mounting to said base so that a portion of said upper clamping member is cantilevered from said base, wherein said upper clamping member includes provision for at least one bolt extending through said portion into said base such that tightening said bolt elastically deflects

- said upper clamping member against one side of the knife.
2. An assembly for clamping a knife, comprising:
 - a base; and
 - a clamp including an upper clamping member for mounting to said base and a wearshoe for separately mounting to said base, said clamp for clamping the knife between said upper clamping member and said wearshoe, wherein said wearshoe and said base include cooperatively interlocking portions adapted to resist relative motion between said wearshoe and said base in a first direction.
 3. An assembly for clamping a knife, comprising:
 - a base; and
 - a clamp including an upper clamping member for mounting to said base and a wearshoe for separately mounting to said base, said clamp for clamping the knife between said upper clamping member and said wearshoe, wherein said wearshoe and said base include cooperatively ramping portions adapted to resist relative motion between said wearshoe and said base in one direction.
 4. An apparatus for cutting an article of wood, comprising:
 - a ring assembly comprising two end plates for rotation about an axis of rotation; and
 - a plurality of knife assemblies, each assembly comprising an elongate knife having a cutting edge extending along an elongate axis, a base, and a clamp for clamping the knife to the base, said assemblies for installation between said end plates such that the shoulder portions of at least two shoulder bolts extend through one of said end plates into said base.
 5. The apparatus of claim 4, wherein said clamp includes an upper clamping member for mounting to said base so that a portion of said upper clamping member is cantilevered from said base, wherein said upper clamping member includes provision for at least one bolt extending through said portion into said base such that tightening said bolt elastically deflects said upper clamping member against one side of the knife.
 6. The assembly of claim 1 or the apparatus of claim 5, wherein said clamp further includes a wearshoe for mounting to said base and supporting the other side of the knife.
 7. The assembly or the apparatus of claim 6, wherein said wearshoe and said base include cooperatively interlocking portions adapted to resist relative motion between said wearshoe and said base in a first direction.
 8. The assembly or the apparatus of claim 6, wherein said wearshoe and said base include cooperatively ramping portions adapted to resist relative motion between said wearshoe and said base in one direction.
 9. The apparatus of claim 4, wherein said clamp includes an upper clamping member for mounting to said base and a wearshoe for separately mounting to said base, said clamp for clamping the knife between said upper clamping member and said wearshoe, wherein said wearshoe and said base include cooperatively interlocking portions adapted to resist relative motion between said wearshoe and said base in a first direction.
 10. The assembly of any one of claims 2, 6 or 7 or the apparatus of claim 7 or claim 9, wherein said wearshoe and said base include cooperatively ramping portions adapted to resist relative motion between said wearshoe and said base in a second direction opposite to said first direction.
 11. The apparatus of claim 10, wherein said knife includes dual cutting-edges.

Fig. 1
(PRIOR ART)

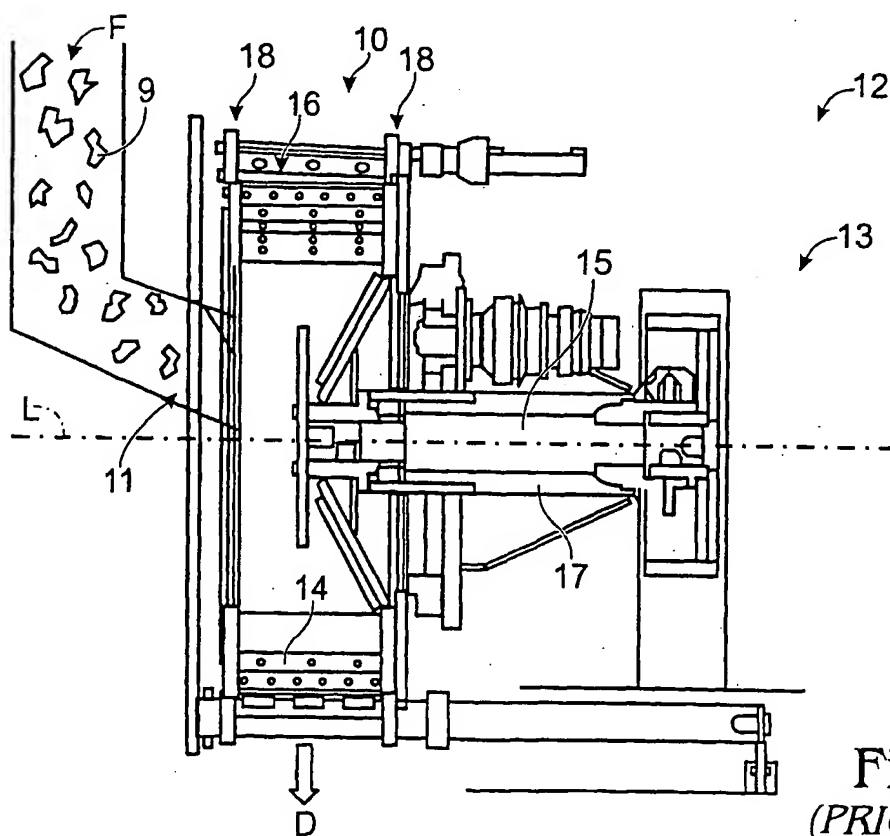
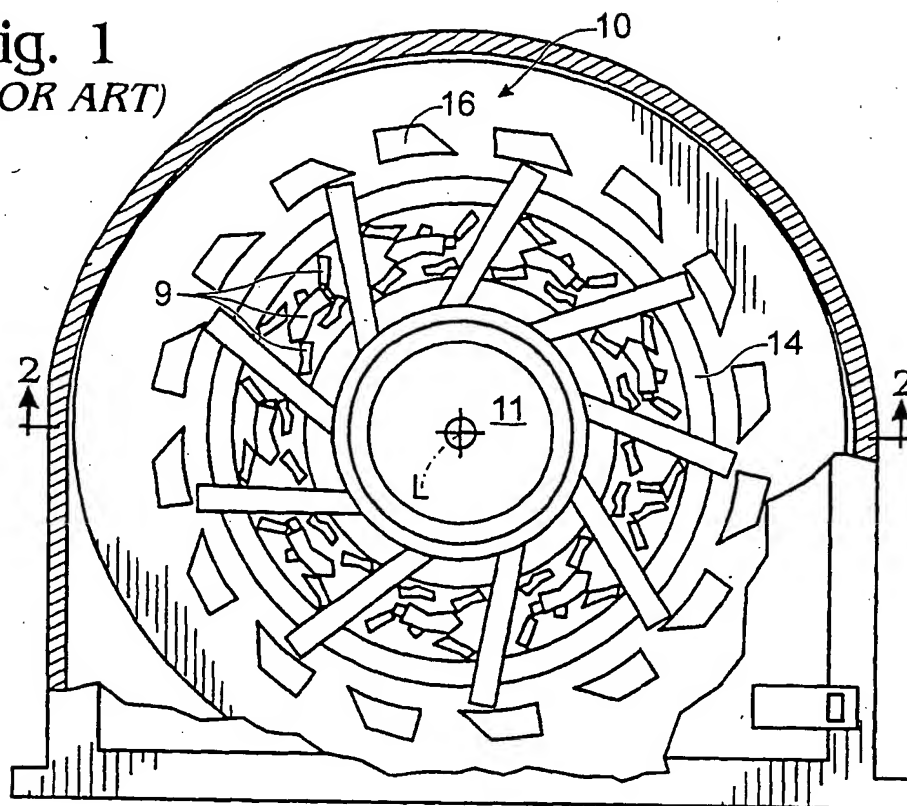


Fig. 2
(PRIOR ART)

Fig. 3
(PRIOR ART)

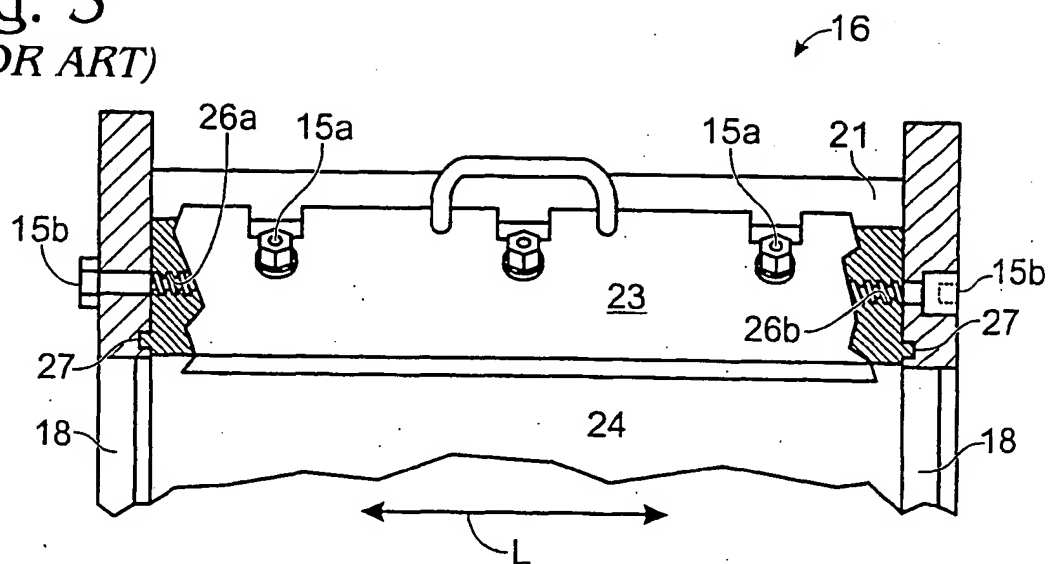
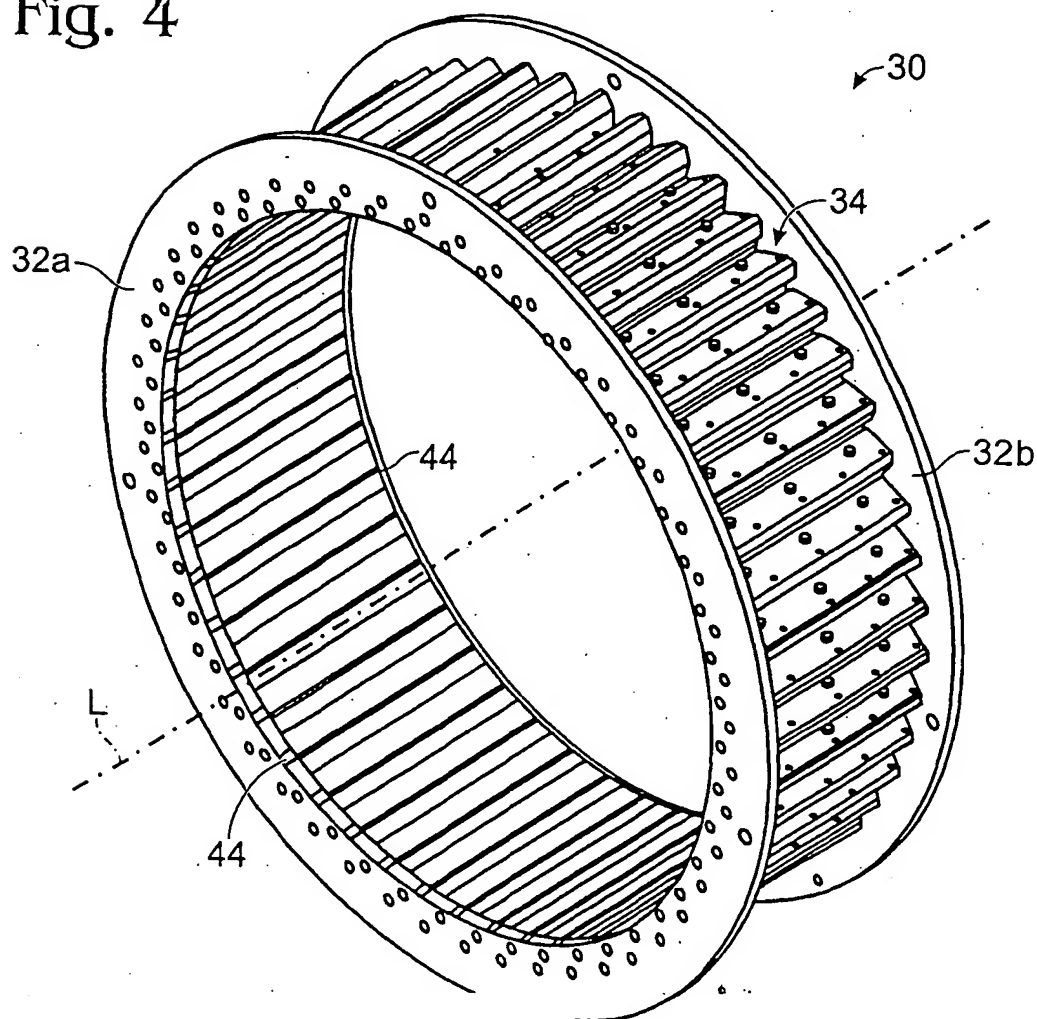


Fig. 4



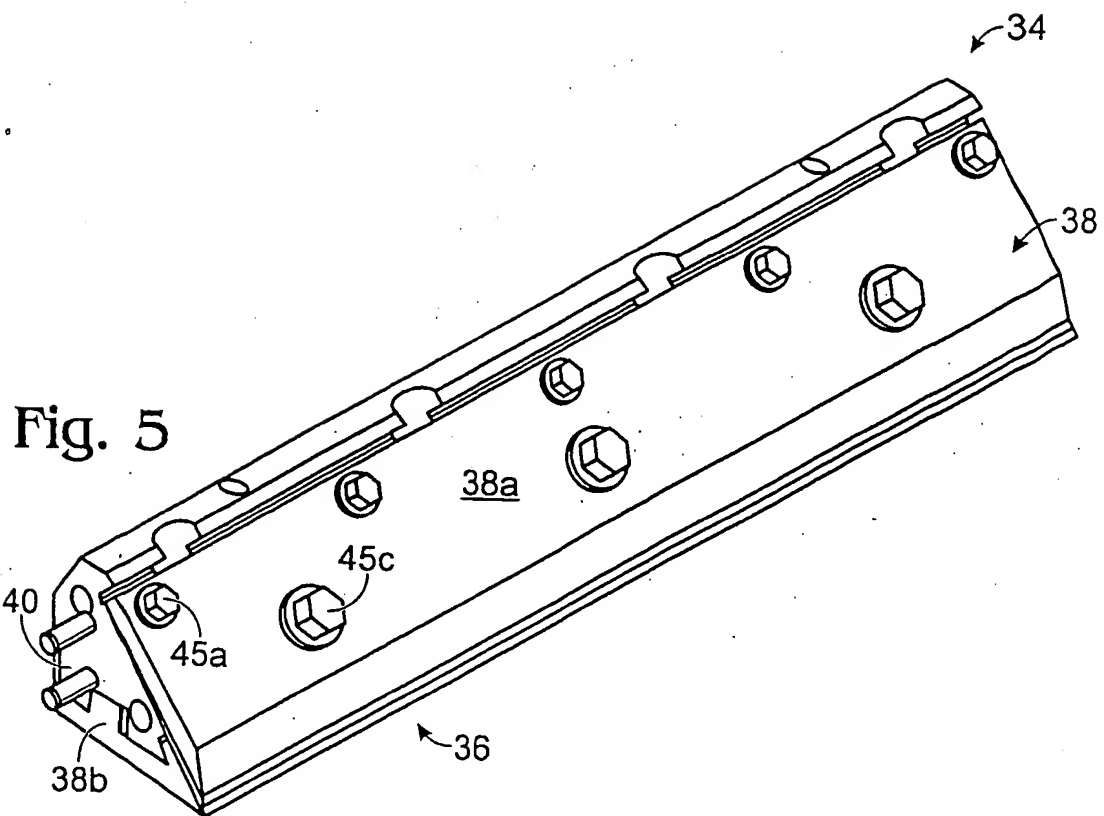


Fig. 6

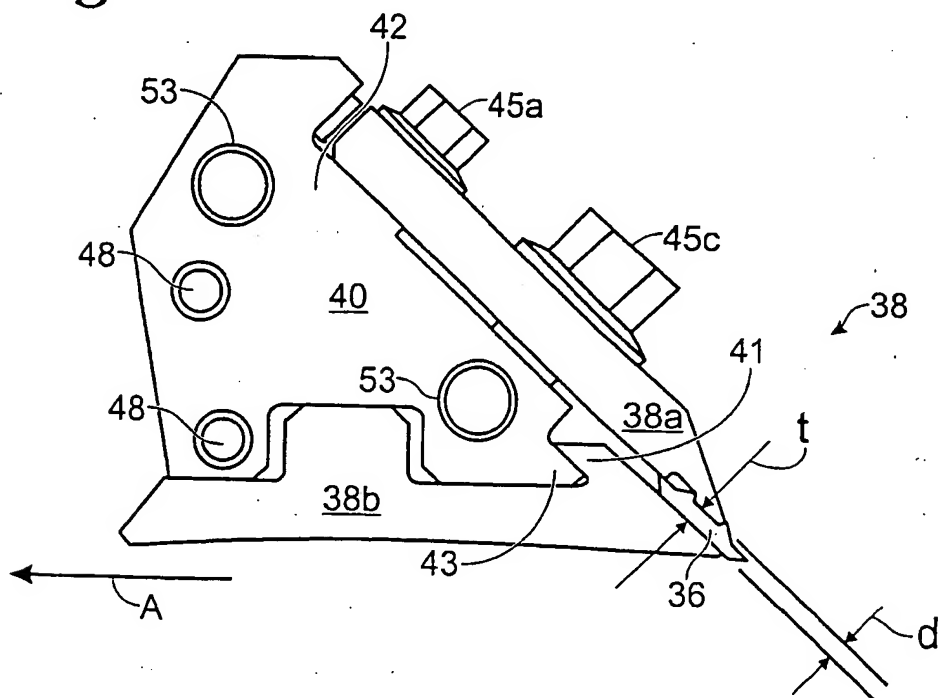


Fig. 8B

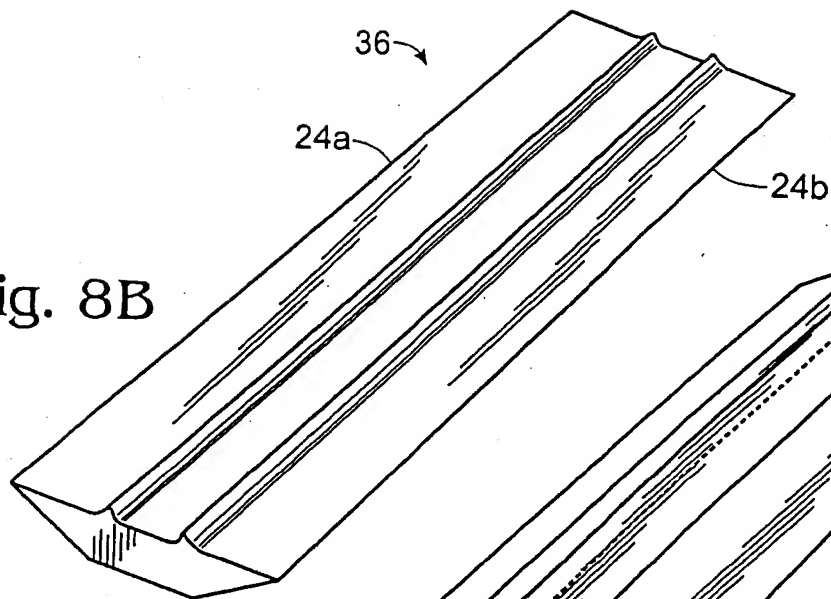


Fig. 8A

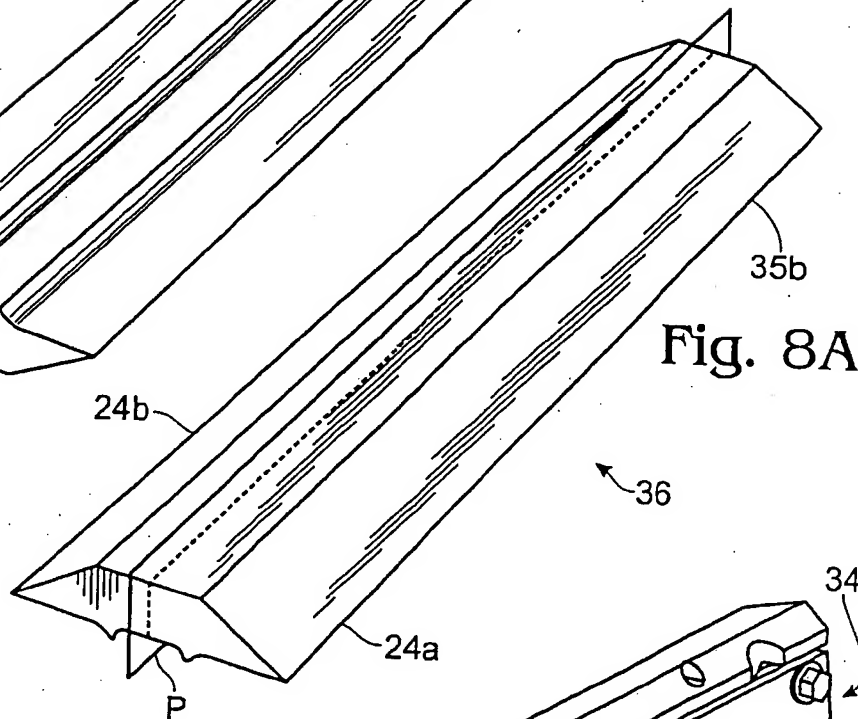
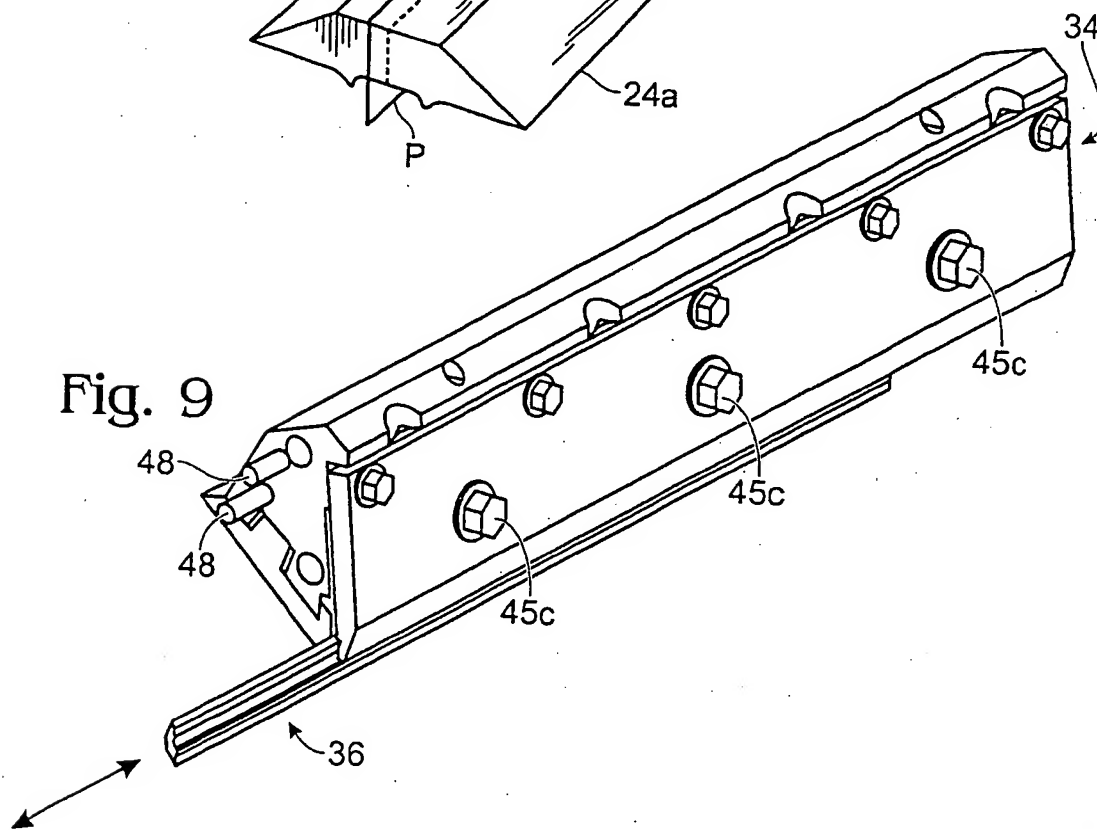


Fig. 9



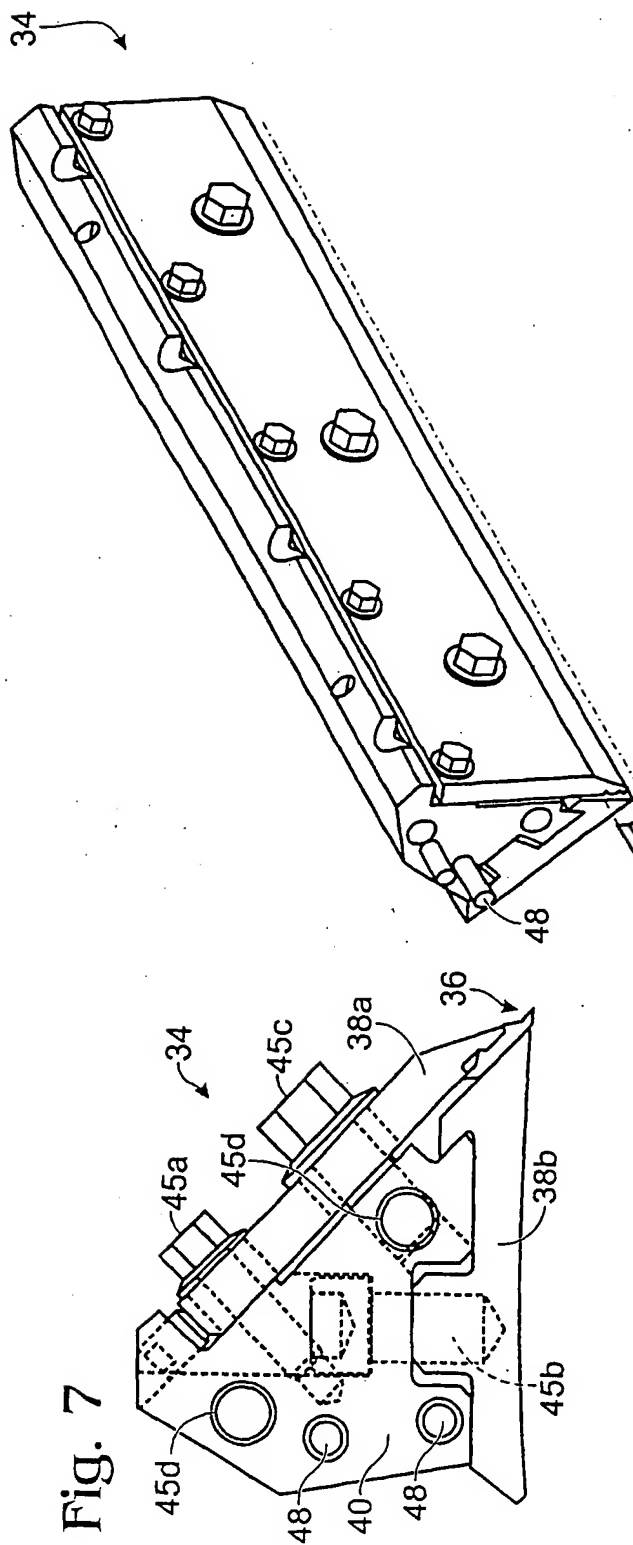


Fig. 7

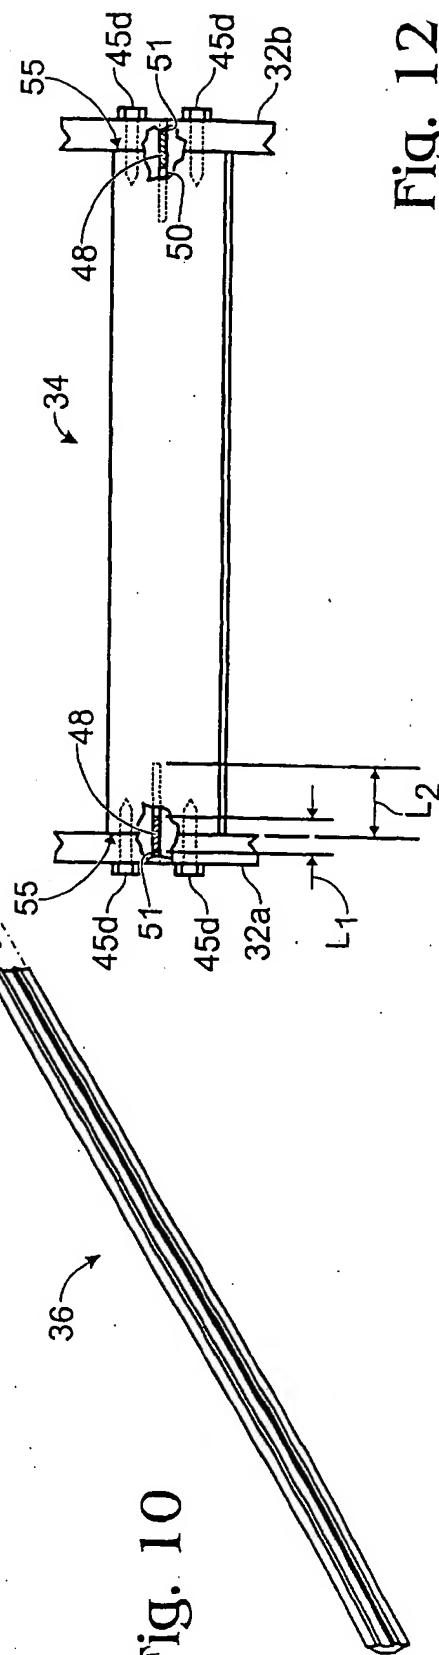



Fig. 10

Fig. 12

10 





DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P,X, L	EP 1 413 410 A (KEY KNIFE, INC) 28 April 2004 (2004-04-28) * paragraph [0025]; figures * -----	1-3,6-8	B27L11/00 B27L11/02
X	EP 0 990 494 A (DIMETAL) 5 April 2000 (2000-04-05) * figure 3 * -----	2,10,11	
Y	US 6 561 885 B1 (LOTH ROBERT) 13 May 2003 (2003-05-13) * figures 2,3 * -----	4,9	
Y	US 5 816 303 A (SHADECK ET AL) 6 October 1998 (1998-10-06) * column 6, line 1 - line 11; figure 506 * -----	4,9	
A	DE 199 17 645 A1 (H.-I. PALLMANN GMBH & CO) 26 October 2000 (2000-10-26) * figure 1 * -----	2,10	
A	DE 76 09 913 U1 (PALLMANN KG MASCHINENFABRIK, 6660 ZWEIBRUECKEN) 29 July 1976 (1976-07-29) -----	2,10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	DE 11 99 477 B (CONDUX-WERK HERBERT A. MERGES K. G) 26 August 1965 (1965-08-26) * figure * -----	2,10	B27L
A	DE 35 17 236 A1 (PALLMANN MASCHINENFABRIK GMBH & CO KG; PALLMANN MASCHINENFABRIK GMBH &) 13 November 1986 (1986-11-13) -----	10	
A	US 5 937 923 A (BIELAGUS ET AL) 17 August 1999 (1999-08-17) * figure 8 * -----	11	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 13 April 2005	Examiner Huggins, J
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

2
EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 00 2443

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

13-04-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1413410	A	28-04-2004	US 6757952 B1	06-07-2004
			AU 2003248379 A1	13-05-2004
			BR 0304048 A	08-09-2004
			CA 2441632 A1	12-04-2004
			EP 1413410 A2	28-04-2004
			EP 1510308 A2	02-03-2005
			NZ 528603 A	28-05-2004
			US 2004168745 A1	02-09-2004
EP 0990494	A	05-04-2000	FR 2783725 A1	31-03-2000
			EP 0990494 A1	05-04-2000
US 6561885	B1	13-05-2003	DE 19921597 C1	27-07-2000
			BR 0002084 A	02-01-2001
			EP 1050390 A2	08-11-2000
			JP 2000350940 A	19-12-2000
US 5816303	A	06-10-1998	US 5725035 A	10-03-1998
			US 5957174 A	28-09-1999
			CA 2206662 A1	05-12-1997
			CN 1167025 A ,C	10-12-1997
			EP 0811462 A1	10-12-1997
DE 19917645	A1	26-10-2000	NONE	
DE 7609913	U1	29-07-1976	FR 2346118 A1	28-10-1977
DE 1199477	B	26-08-1965	NONE	
DE 3517236	A1	13-11-1986	NONE	
US 5937923	A	17-08-1999	CA 2279922 A1	10-02-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82